

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
11 January 2001 (11.01.2001)

PCT

(10) International Publication Number
WO 01/03466 A2

- (51) International Patent Classification⁷: **H04R** (NL) **NIEUWENDIJK**, Joris, A., M. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: PCT/EP00/05962
- (22) International Filing Date: 27 June 2000 (27.06.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
99202162.6 2 July 1999 (02.07.1999) EP
- (71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **AARTS, Ronaldus**, M. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven
- (81) Designated States (national): CN, JP, KR, US.
- (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- Published:
— Without international search report and to be republished upon receipt of that report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LOUDSPEAKER PROTECTION SYSTEM HAVING FREQUENCY BAND SELECTIVE AUDIO POWER CONTROL

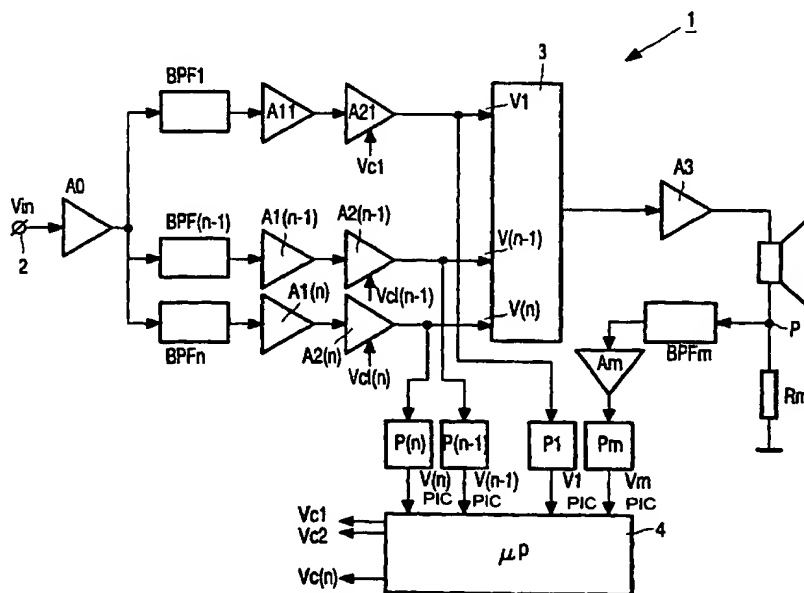

(57) Abstract: A loudspeaker protection system comprises filter means for defining one or more frequency bands of an audio signal, controllable amplifier/attenuator means coupled to the filter means, and processing means coupled to control the amplifier/attenuator means, such as to determine audio power in at least one of said frequency bands representing relevant loudspeaker protection information used for selective audio power control in said at least one frequency band. This system has the features for a fast and/or slow thermal protection, as well as for a cone excursion protection all for a loudspeaker in such a system.

WO 01/03466 A2

Loudspeaker protection system having frequency band selective audio power control.

The present invention relates to a loudspeaker protection system comprising filter means for defining one or more frequency bands of an audio signal.

5 The present invention also relates to a audio set provided with a loudspeaker protection system.

Such a loudspeaker protection system is known from DE-AS 24 15 816 and can be applied in compact, small size, so called micro, mini or midi audio sets. The known loudspeaker protection system comprises respective bandwidth controllable filter means,
10 whose individual bandwidths in particular in the low and high frequency bands are controllable by means of a control means coupled to the loudspeaker of the system. In order to thermally protect the loudspeaker against short or long lasting overload the filter means can be influenced by decreasing the output level of the audio signal for the loudspeaker. Merely decreasing the loudspeaker output level within e.g. a bass frequency range may provide some
15 protection, but at the same time it is a disadvantage of the known loudspeaker protection system that it sacrifices loudspeaker output power unnecessary and thus fails to make effective use of available loudspeaker output power. In addition this sacrifice of output power is a major commercial disadvantage in particular for the young aged target group of these audio sets.

20 Therefore it is the aim of the present invention to provide a loudspeaker protection system, which is made effective for the specified purpose of protecting the loudspeaker only, without unnecessary effecting the full power range available for the loudspeaker.

25 Thereto the loudspeaker protection system according to the present invention is characterised in that the loudspeaker protection system further comprises controllable amplifier/attenuator means coupled to the filter means, and processing means coupled to control the amplifier/attenuator means, such as to determine audio power in at least one of said

frequency bands representing relevant loudspeaker protection information used for selective audio power control in said at least one frequency band.

By determining the respective audio output powers for the loudspeaker in
5 respective frequency bands accurate information comes available about the variety of sources of dangers which are connected to loudspeakers, such as short and long term overload, as well as excessive excursion or displacement of the loudspeaker cone or coil, which is a well known source of all kinds of distortion in reproduced loudspeaker sounds. Thus a multi-purpose loudspeaker protection system is made available, which can be dedicated to its specific
10 protection functions without unnecessary effecting the full power range available for the loudspeaker. Audio power in respective frequency bands has thus proven to provide a reliable source of loudspeaker protection information so that no audio output power is sacrificed needlessly and the maximum audio output performance can be delivered without endangering the loudspeaker.

15 One embodiment of the loudspeaker protection system according to the invention is characterised in that the processing means are equipped to determine the audio power S_j in frequency band j in proportion to:

$$v_{jtop}^2 * R\{Y_j\},$$

20 where v_{jtop} is the peak value of the amplitude of the frequency components in frequency band j , and $R\{Y_j\}$ is the real part of the electric admittance of the loudspeaker in frequency band j .

Advantageously v_{jtop} can be derived from the respective outputs of the amplifier/attenuator means and $R\{Y_j\}$ can either be estimated or predicted, or can more accurately actually be measured in a further embodiment by means of a measuring element
25 arranged in series with the loudspeaker.

A further embodiment of the loudspeaker protection system according to the invention is characterised in that in the loudspeaker protection system $j = 1, 2, 3 \dots n$, where n equals the number of frequency bands wherein the frequency spectrum of the audio signal is
30 divided.

Starting with $j = 1$, which is the frequency band containing the lowest frequency components of the audio signal, this band contains relevant information, which is a good estimate for the resistance of the voice coil of the loudspeaker. This resistance depends on and generally increases with the actual temperature of the voice coil. So the information contained

in S_1 may be used to activate the amplifier/attenuator means to function as a slow term thermal protection. Similarly S_2 for example containing frequency components around the so called Helmholtz frequency (e.g. between 25 Hz and 85 Hz for a bass reflex loudspeaker system) provides accurate information about the actual excursion of the cone of the loudspeaker. So
5 the information contained in S_2 may be used to activate the amplifier/attenuator means to function as a fast cone excursion protection.

A still further embodiment of the loudspeaker protection system according to the invention is characterised in that the processing means are capable of summing S_j over a
10 specified subrange of possible values of j , where j is in the range from 1, 2, ... n.

Advantageously summing S_j over possibly all values from 1 to n reveals a value of S which represents information about the momentaneous electrical dissipation in the loudspeaker. So the information contained in S may be used to activate the amplifier/attenuator means to function as a fast thermal protection.

15

In practise some sensible and fast enough summed value or combination of values S_j will be used so that if these respective values approximate some normalised individual value S_{norm} the amplifier/attenuator means are controlled by the processing means to take proper action to protect the loudspeaker.

20

By in a still further embodiment of the invention determining S_j or any summation thereof every 0.001 - 2 sec., in particular every .1 - 1 sec updated data are derived such that an accurate and reliable protection is available at all times. Advantageously the present invention can be applied not only in the low frequency range for bass loudspeakers,
25 but also for mid-tone and high-tone loudspeakers.

Principally various values and value control methods are possible for the amplifier/attenuator means but preferably in another embodiment of the loudspeaker protection system they are controlled such by the processing means that attenuation factors of
30 the amplifier/attenuator means are proportional to:

$$1 / \sqrt{\alpha} + \beta_j (1 - 1 / \sqrt{\alpha})$$

where $\alpha = S / S_{\text{norm}}$, and β_j represents a factor whose value depends empirically on the particular frequency band j .

Still another embodiment of the loudspeaker protection system according to the invention is characterised in that the loudspeaker protection system comprises a series arrangement of the loudspeaker and a measuring element such as a resistance, whose common connection point is coupled to the processing means to account for actual impedance data of the loudspeaker.

Advantageously measurement of actual impedance data of the loudspeaker improves reliability and accuracy of the protection system.

It is preferred that the processing means is arranged to initiate control in a shorter amount of time than that control is withdrawn.

Advantage thereof is that this way of starting and completing control is less audible and disturbing for the human ear.

At present the loudspeaker protection system according to the invention will be elucidated further together with its additional advantages while reference is being made to the appended drawing. In the drawing:

Fig. 1 shows a schematic representation to illustrate possible embodiments of the loudspeaker protection system according to the present invention; and

Fig. 2 shows graphs of the impedance versus frequency of two types of loudspeakers.

Fig. 1 shows a possible loudspeaker protection system 1. The system 1 comprises an audio signal input terminal 2 connected to a possible dividing amplifier A0, which is connected to a parallel arrangement of filter means of the system 1, which filter means are arranged as bandpass filters BPF1-BPF(n-1), and possibly BPF(n), whereby the latter may be a highpass filter. Each of the respective filter means BPF is connected to controllable amplifier/attenuator means, shown as separate amplifiers A11-A1(n) and attenuators A21-A2(n). Each of the amplifier/attenuator means is provided with a control input Vc1-Vc(n), such that the amplification or attenuation of the amplifier/attenuator means can be controlled in dependence on the respective control signals there on. Output signals designated v1-v(n) are input to an adder 3, which in turn is connected to an amplifier A3 and then to a loudspeaker LS, which is coupled to earth. The system 1 comprises processing means 4 fed by the output signals v1-vn through peak-value detectors P1-Pn. The peak-value detectors P1-Pn finally input signals V1-Vn, which are representative for the peak value of the output signals

v1-vn. The processing means 4 provide control signals Vc1-Vc(n-1) to the correspondingly designated control inputs of the amplifier/attenuator means. Additionally in a further embodiment of the loudspeaker protection system 1 further control information may be derived from a measuring element, such as a resistor Rm, which through a further bandpass filter BPMm, an amplifier Am and a further peak detector Pm, which control information is also conveyed to the processing means 4. Principally all constituting elements of the loudspeaker protection system 1 can be implemented in either an analog, or digital, or hybrid way, whereby conversion takes place by means of suitable A/D and D/A convertors and, where possible, multiplexers are applied to reduce the number of necessary convertors. The processing means 4 can be implemented by means of a properly programmed processor, such as a microprocessor or computer.

The functioning of the loudspeaker protection system 1 is as follows. The audio signal on input terminal 2 is divided in separate frequency bands by the filter means BPF1-BPFn. The audio power S_j in each of the frequency bands j is being calculated repeatedly by the processing means 4 in the embodiment as shown as:

$$S_j = v_{jtop}^2 * R\{Y_j\} * (A_3)^2,$$

where v_{jtop} is the peak value of the amplitude of the frequency components in frequency band j , $R\{Y_j\}$ is the real part of the electric admittance of the loudspeaker in frequency band j and A_3 is the gain of amplifier A3. The latter may come from a table with premeasured data concerning the electric admittance of the loudspeaker LS concerned or may be actually measured by means of the measuring element Rm, which will be elucidated later. The number n of frequency bands may for example be between 2 and 8. The lowest frequency band contains information in the form of the audio power S_1 present therein, which is a good estimate for the resistance of the voice coil of the loudspeaker. This resistance increases with the actual temperature of the voice coil. If in an audio signal at a certain moment S_1 exceeds a normalised loudspeaker value S_{norm} then the amplifier/attenuator means are activated by the processing means 4 and the control signal Vc1 is influenced to decrease the power S_1 , which reduces critical audio power to the loudspeaker, such that a long term (slow) thermal protection thereof is achieved. The output power S_1 is controllably reduced as far as necessary for protection of the loudspeaker LS, whose full power range can thus safely be used.

Similarly S_2 for example containing frequency components around the so called Helmholtz frequency and above (e.g. between 25 Hz and 85 Hz for a bass reflex loudspeaker

system) provides accurate information about the actual excursion of the cone of the loudspeaker. An example of an Helmholtz band and Helmholtz frequency f_H is shown in fig. 2 between f_1 and f_2 . The one peak curve as shown is representative for a normal loudspeaker system. So the information contained in S_2 in the form of audio output power around the Helmholtz frequency may be used to activate the amplifier/attenuator means to function as a fast cone excursion protection. If the audio power in S_2 exceeds a predetermined level then this is an indication that the voice coil moves out of its magnetic field and an unwanted large excursion arises. Cone protection is achieved by allowing the processing means 4 to control the output power in S_2 such that it is lowered to an extend that said predetermined level is not exceeded for the particular loudspeaker. Offcourse any suitable combination of frequency bands S_j may be used and/or summed to provide the wanted information about excessive cone excursions.

The following protection that may achieved is a long range or fast thermal protection protecting against high-level peaks in the audio signal for the loudspeaker. this can take place by determining in the processing means 4 the sum S of output power S_j in several frequency bands by:

$$S = \sum v_{jtop}^2 * R\{Y_j\} * (A_3)^2.$$

If S exceeds a further normalised predetermined value then control action is taken by the processing means such that finally S decreases and the summed, possibly total audio power in the loudspeaker decreases, which protects the loudspeaker LS against momentaneous high-level audio peaks. The processing means are capable to determine S_j or any summation S thereof every 0.001 - 2 sec., in particular every .1 - 1 sec. This will generally depend on the expected variations in the audio signal and on the speed of the hardware and software needed to program the processing means 4 properly. Of course any of the above described protection methods may be combined and performed in any obvious way for either bass, mid-tone, or high-tone loudspeakers.

Control of the attenuation factors V_{c1} - V_{cn} will take place gently in order not to attenuate the audio signal to much, and such that the full power range of the loudspeaker LS is still usable. A possible way of control is that the amplifier/attenuator means are controlled such by the processing means that the attenuation factors of the amplifier/attenuator means are proportional to:

$$1 / \sqrt{\alpha} + \beta_j (1 - 1 / \sqrt{\alpha})$$

where $\alpha = S / S_{\text{norm}}$, S_{norm} represents the further normalised predetermined value of S , and β_j represents a factor whose value depends empirically on the particular frequency band j . For example β_j may be chosen 0, 1/4, 2/4, 3/4, 1. Herein S may be summed over one or more frequency bands. For example attenuation (or inverse amplification) in the amplifier/attenuator means can even more gradually be adjusted proportional to:

$$\{\tau^x + \beta_j(1 - \tau^x)\} \{1 / \sqrt{\alpha} + \beta_j(1 - 1 / \sqrt{\alpha})\}$$

where for fast thermal protection τ exceeds 1 and x is a constant to be determined empirically. Generally it is preferred for human perception reasons that the processing means 4 are arranged to initiate control in a shorter amount of time than that the control is withdrawn.

10

In the above mentioned further embodiment the loudspeaker protection system 1 comprises the measuring element R_m . The data concerning the momentaneous impedance and voltage across the element R_m on for example common connection point P can be used by the processing means 4, instead of corresponding data in a memory table of the processing means 4 to have actual and thus more accurate and reliable values available for each possible combination of the above mentioned protection methods.

15

CLAIMS:

1. Loudspeaker protection system comprising filter means for defining one or more frequency bands of an audio signal, characterised in that the loudspeaker protection system further comprises controllable amplifier/attenuator means coupled to the filter means, and processing means coupled to control the amplifier/attenuator means, such as to determine
5 audio power in at least one of said frequency bands representing relevant loudspeaker protection information used for selective audio power control in said at least one frequency band.

2. Loudspeaker protection system according to claim 1, characterised in that the
10 processing means are equipped to determine the audio power S_j in frequency band j in proportion to:

$$v_{jtop}^2 * R\{Y_j\},$$

where v_{jtop} is the peak value of the amplitude of the frequency components in frequency band j , and $R\{Y_j\}$ is the real part of the electric admittance of the loudspeaker in frequency band j .
15

3. Loudspeaker protection system according to claim 2, characterised in that in the loudspeaker protection system $j = 1, 2, 3 \dots n$, where n equals the number of frequency bands wherein the frequency spectrum of the audio signal is divided.

20 4. Loudspeaker protection system according to claim 2 or 3, characterised in that the processing means are capable of summing S_j over a specified subrange of possible values of j , where j is in the range from 1, 2, ... n .

25 5. Loudspeaker protection system according to claim 4, characterised in that if any summed value or combination of values S_j approximates some normalised value S_{norm} the amplifier/attenuator means are controlled by the processing means.

6. Loudspeaker protection system according to claim 4 or 5, characterised in that the processing means are equipped to determine S_j or any summation thereof every 0.001 - 2 sec., in particular every .1 - 1 sec.

5 7. Loudspeaker protection system according to any of the claims 1-6, characterised in that the amplifier/attenuator means are controlled such by the processing means that attenuation factors of the amplifier/attenuator means are proportional to:

$$1 / \sqrt{\alpha} + \beta_j (1 - 1 / \sqrt{\alpha})$$

10 where $\alpha = S / S_{\text{norm}}$, and β_j represents a factor whose value depends empirically on the particular frequency band j .

8. Loudspeaker protection system according to any of the claims 1-7, characterised in that the loudspeaker protection system comprises a series arrangement of the loudspeaker and a measuring element such as a resistance, whose common connection point is
15 coupled to the processing means to account for actual impedance data of the loudspeaker.

9. Loudspeaker protection system according to one of the claims 1-8, characterised in that the processing means is arranged to initiate control in a shorter amount of time than that control is withdrawn.

20 10. Audio set provided with a loudspeaker protection system according to one of the claims 1-9.

1/1

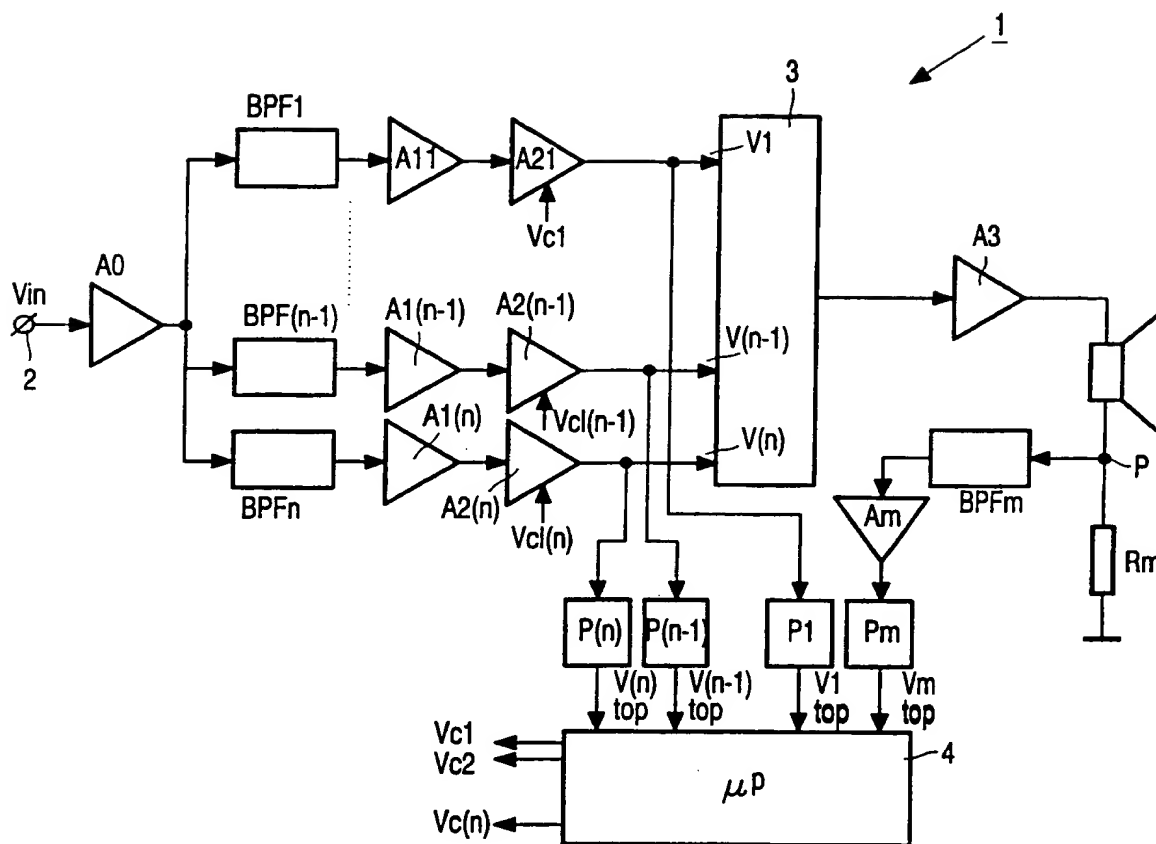


FIG. 1

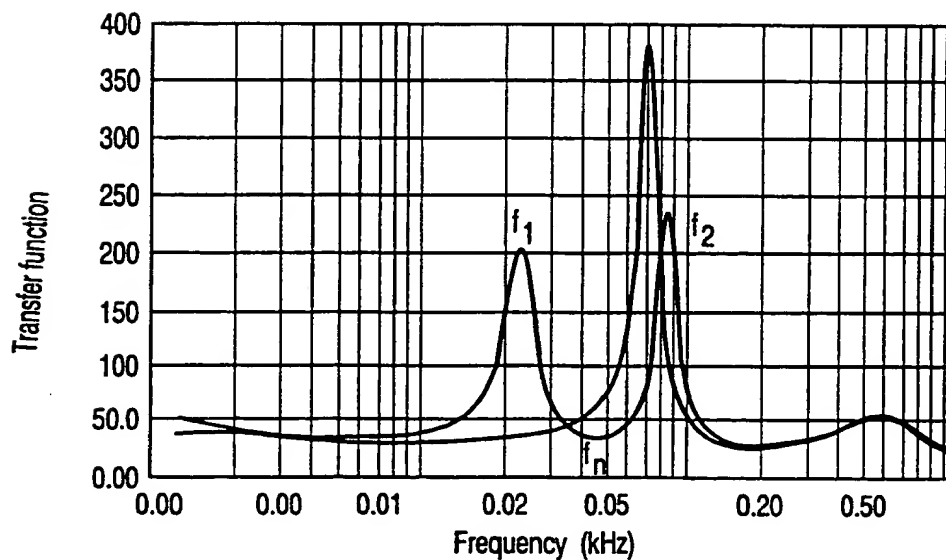


FIG. 2

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 January 2001 (11.01.2001)

PCT

(10) International Publication Number
WO 01/03466 A3

(51) International Patent Classification⁷: **H04R 3/00**

(NL). NIEUWENDIJK, Joris, A., M. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number: **PCT/EP00/05962**

(74) Agent: **SCHOENMAKER, Maarten**; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(22) International Filing Date: **27 June 2000 (27.06.2000)**

(25) Filing Language: **English**

(81) Designated States (*national*): **CN, JP, KR, US.**

(26) Publication Language: **English**

(84) Designated States (*regional*): **European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).**

(30) Priority Data:
99202162.6 **2 July 1999 (02.07.1999) EP**

Published:
— *With international search report.*

(71) Applicant (*for all designated States except US*): **KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL];**
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).


(88) Date of publication of the international search report:
17 May 2001

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **AARTS, Ronaldus, M. [NL/NL];** Prof. Holstlaan 6, NL-5656 AA Eindhoven

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **LOUDSPEAKER PROTECTION SYSTEM HAVING FREQUENCY BAND SELECTIVE AUDIO POWER CONTROL**

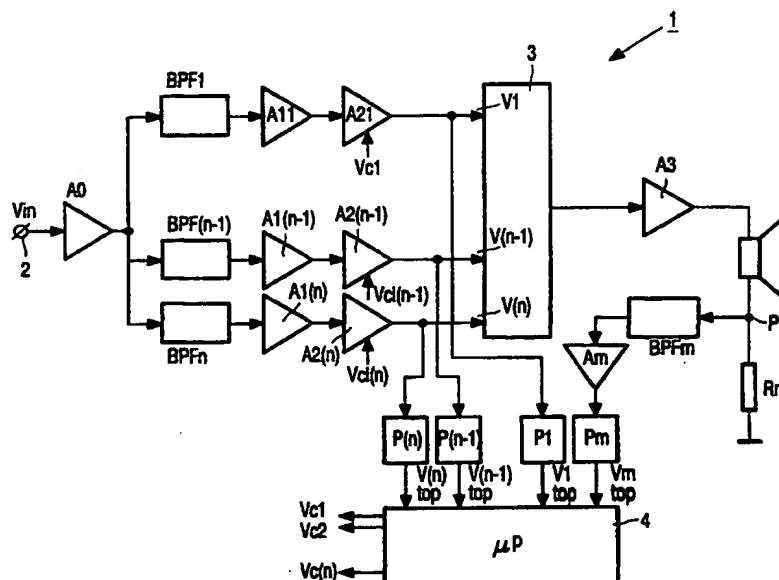

(57) Abstract: A loudspeaker protection system comprises filter means for defining one or more frequency bands of an audio signal, controllable amplifier/attenuator means coupled to the filter means, and processing means coupled to control the amplifier/attenuator means, such as to determine audio power in at least one of said frequency bands representing relevant loudspeaker protection information used for selective audio power control in said at least one frequency band. This system has the features for a fast and/or slow thermal protection, as well as for a cone excursion protection all for a loudspeaker in such a system.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/05962

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04R3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04R H02H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 779 706 A (NOKIA TECHNOLOGY GMBH) 18 June 1997 (1997-06-18) column 5, line 31 - line 33 column 6, line 46 - line 51 column 7, line 22 - line 30 column 8, line 44 - line 49; figures 1,2 ---	1,10
X	EP 0 843 502 A (YAMAHA CORP) 20 May 1998 (1998-05-20) abstract; figure 1 ---	1,10
X	US 4 783 819 A (DE KONING STEPHANUS H ET AL) 8 November 1988 (1988-11-08) column 3, line 26 - line 41 ---	1,10
X	US 4 887 298 A (HAIGLER ROBERT M) 12 December 1989 (1989-12-12) abstract; figures 1,2 ---	1,10
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

4 January 2001

Date of mailing of the international search report

11/01/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Leouffre, M

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/05962

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 009, no. 284 (E-357), 12 November 1985 (1985-11-12) & JP 60 126998 A (MATSUSHITA DENKI SANGYO KK), 6 July 1985 (1985-07-06) abstract ---	1,10
X	PATENT ABSTRACTS OF JAPAN vol. 010, no. 016 (E-375), 22 January 1986 (1986-01-22) & JP 60 176313 A (MATSUSHITA DENKI SANGYO KK), 10 September 1985 (1985-09-10) abstract -----	1,10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/05962

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0779706	A	18-06-1997	DE 19547093 A	19-06-1997
			US 6005953 A	21-12-1999
EP 0843502	A	20-05-1998	JP 10145888 A	29-05-1998
US 4783819	A	08-11-1988	NL 8600406 A	16-09-1987
			DE 3774902 A	16-01-1992
			EP 0235848 A	09-09-1987
			JP 62198298 A	01-09-1987
US 4887298	A	12-12-1989	NONE	
JP 60126998	A	06-07-1985	JP 1816010 C	18-01-1994
			JP 5028040 B	23-04-1993
JP 60176313	A	10-09-1985	JP 1907384 C	24-02-1995
			JP 6032535 B	27-04-1994

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference PHN 17.509W0	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/EP 00/ 05962	International filing date (day/month/year) 27/06/2000	(Earliest) Priority Date (day/month/year) 02/07/1999
Applicant KONINKLIJKE PHILIPS ELECTRONICS N.V.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.



It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.



the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :



contained in the international application in written form.



filed together with the international application in computer readable form.



furnished subsequently to this Authority in written form.



furnished subsequently to this Authority in computer readable form.



the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.



the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

the text is approved as submitted by the applicant.



the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

the text is approved as submitted by the applicant.



the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

as suggested by the applicant.



because the applicant failed to suggest a figure.



because this figure better characterizes the invention.

1



None of the figures.

INTERNATIONAL SEARCH REPORT

International Application No

/EP 00/05962

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04R3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04R H02H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 779 706 A (NOKIA TECHNOLOGY GMBH) 18 June 1997 (1997-06-18) column 5, line 31 - line 33 column 6, line 46 - line 51 column 7, line 22 - line 30 column 8, line 44 - line 49; figures 1,2 ----	1,10
X	EP 0 843 502 A (YAMAHA CORP) 20 May 1998 (1998-05-20) abstract; figure 1 ----	1,10
X	US 4 783 819 A (DE KONING STEPHANUS H ET AL) 8 November 1988 (1988-11-08) column 3, line 26 - line 41 ----	1,10
X	US 4 887 298 A (HAIGLER ROBERT M) 12 December 1989 (1989-12-12) abstract; figures 1,2 ----	1,10
	----- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

4 January 2001

Date of mailing of the international search report

11/01/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Leouffre, M

INTERNATIONAL SEARCH REPORT

International Application No

/EP 00/05962

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 009, no. 284 (E-357), 12 November 1985 (1985-11-12) & JP 60 126998 A (MATSUSHITA DENKI SANGYO KK), 6 July 1985 (1985-07-06) abstract ---	1,10
X	PATENT ABSTRACTS OF JAPAN vol. 010, no. 016 (E-375), 22 January 1986 (1986-01-22) & JP 60 176313 A (MATSUSHITA DENKI SANGYO KK), 10 September 1985 (1985-09-10) abstract -----	1,10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

/EP 00/05962

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 0779706	A	18-06-1997	DE	19547093 A	19-06-1997
			US	6005953 A	21-12-1999
EP 0843502	A	20-05-1998	JP	10145888 A	29-05-1998
US 4783819	A	08-11-1988	NL	8600406 A	16-09-1987
			DE	3774902 A	16-01-1992
			EP	0235848 A	09-09-1987
			JP	62198298 A	01-09-1987
US 4887298	A	12-12-1989	NONE		
JP 60126998	A	06-07-1985	JP	1816010 C	18-01-1994
			JP	5028040 B	23-04-1993
JP 60176313	A	10-09-1985	JP	1907384 C	24-02-1995
			JP	6032535 B	27-04-1994